

MANIACCESS



‘ 80 VJR
105 VJR

Very effective and easy to transport



80 VJR

	Safe working load 200 kg Inside use only
	Working height 7.90 m Platform height 5.90 m
	Overall length 2.81 m Overall width 0.99 m Overall height 1.99 m Outreach 3.30 m Basket size 0.99 m X 1.05 m Ground clearance 8.5 cm Turning radius : inside 0.52 m outside 2.02 m
	Turret rotation 350° Jib tilting 140°
	Traction battery 24 v/180 Ah (C5) Integrated charger 24 v/30 A
	Travel speed 0 to 3.6 km/h Number of speeds 3
	Gradeability 28 % Max. slope accepted 2° or 3.5 %
	Tyres 18.7/8 PPS 2 wheel drive (Rear) and 2 steering wheel (front)
	Hydraulic tank 28 L.
	Weight 2400 kg

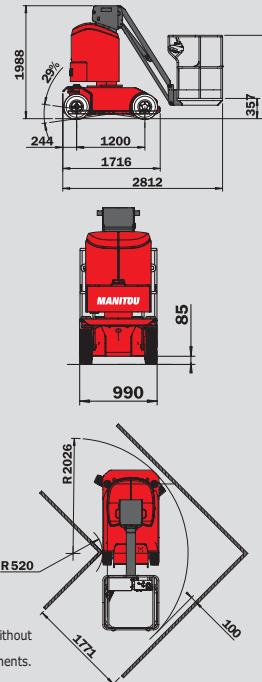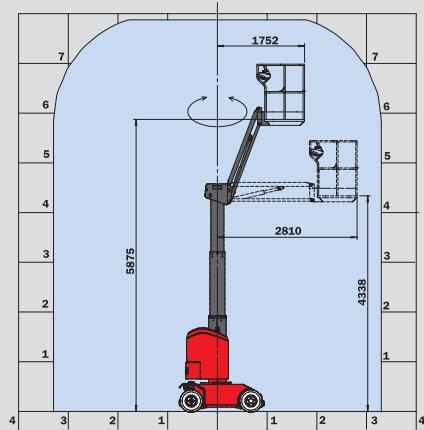

105 VJR

	Safe working load 200 Kg Outside use SWL 200 Kg Winds up to 45 km/h
	Working height 10.30 m Platform height 8.30 m
	Overall length 2.81 m Overall width 0.99 m Overall height 1.99 m Outreach 3.30 m Basket size 0.99 m X 1.05 m Ground clearance 8.5 cm Turning radius : inside 0.52 m outside 2.02 m
	Turret rotation 350° Jib tilting 140°
	Traction battery 24 v/270 Ah (C5) Integrated charger 24 v/30 A
	Travel speed 0 to 3.6 km/h Number of speeds 3
	Gradeability 22 % Max. slope accepted 3° or 5 %
	Tyres 18.7/8 PPS 2 wheel drive (Rear) and 2 steering wheel (front)
	Hydraulic tank 28 L.
	Weight 3280 kg

This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice.
The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments.



MANITOU BF SA

B.P. 249 - 44158 Ancenis Cedex - France
Tel. : 33 2 40 09 10 11 / Export Department Fax : 33 2 40 09 10 97
www.manitou.com

700172EN